

MSNG-2500

Mini Rack Mount Spectrum Analyzer



- 60% Shorter in Length Compared to The Full Sized SNG
- Mounting Brackets Standard to fit half-width rack rails
- Up To Two Switchable Inputs
- Simple And Easy to Use Design at A Low Price
- 10 Customizable Preset
- Fast Refresh Rates Up To 13/sec
- L.O. Frequency Offsets for Direct Frequency Readout
- 50 User Memory Locations

Mini SNG

The trends in electronic news gathering are constantly changing. The trucks used in this industry are changing as well. Today's SNG/ENG environment calls for faster, lighter, and less expensive vehicles to perform satellite operations. Traditional full-size vans, Sprinters, and other large trucks are now being replaced with SUVs, minivans, and even small hybrid station wagons! This puts additional pressure on the engineer to be able to utilize all the gear needed to effectively do the job. This means the equipment must be updated and modified as well to meet the demands of today's field engineers. AVCOM's MSNG Series does just that. The MSNG performs all the same tasks as its predecessor, the industry standard SNG, but at a size that's over 60% shorter! The MSNG can be ordered with one or two inputs and LNB power as an option if needed.

Performance & Specifications

The MSNG is designed for the measurement of communications and broadcast carriers, making uplink, downlink, L-band carriers, IF, and 10MHz reference signals easy to monitor and measure. The MSNG provides excellent frequency and amplitude accuracy along with RBW selection from 10kHz to 1MHz. This is required to allow viewing and monitoring of small Telemetry, Tracking, Command Systems (TT&C), and data carriers found in many satellite communications markets today. The front panel can control Frequency & Span with settings for Fine, Medium, and Coarse to allow the operator to dial into the carrier and control the display as needed. The use of persistence, averaging, or waterfall tools allow periodic signals like TDMA or noisy carriers to be more easily detected.



SNG

MSNG

Options

- Up to two inputs in any combination (BNC, F, TNC, SMA, and N available)
- Ethernet
- LNB Power


Accessories include universal AC adaptor (100 to 240Vac), AC cord, and software

Specification subject to change. ©2024 Avcom of Virginia, Inc. v042024

For ordering information email: salesrfq@avcomofva.com or call 804-794-2500

Versatile Remote-Control Software

The SNG can be monitored and controlled both locally from the front panel and remotely using the Avcom Remote Control Software via serial port or optional Ethernet. The Remote-Control Software has an intuitive user interface that is easy to use with no special training required. It allows remote monitoring and control from your network or over the internet. Features include screen shot capture recording, SNMP for alarm/monitoring, cross-polling, markers, and Automated Data Acquisition (DAQ) with tolerance comparison, and integrated email alerts to name a few. Up to twelve windows can be displayed at one time. The Remote-Control Software is available for Windows.

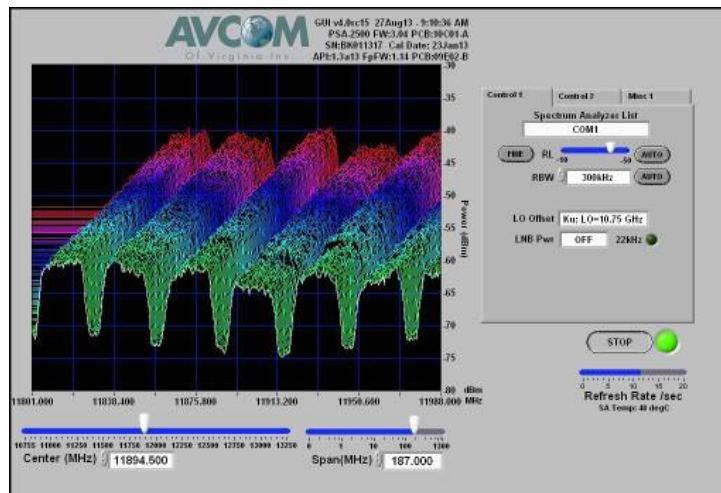

MSNG-2500 - TECHNICAL SPECIFICATIONS DATA

PARAMETER	PERFORMANCE
FREQUENCY RANGE	MSNG-2500C: 5 - 2300MHz
SPAN WIDTH	Up to 1300 MHz (Dependent on Center Frequency)
RESOLUTION BANDWIDTH	10KHz, 100KHz, 300KHz, 1MHz
RF SENSITIVITY	Greater than -85 dBm Typical
REFERENCE LEVELS	Selectable -10 dBm, -30 dBm, & -50dBm (front panel) (5dBm increments in GUI)
SCALE	5 dB/Div & 2 dB/Div
DYNAMIC RANGE	40 dBm on Application Window (50dBm GUI window)
AMPLITUDE ACCURACY	± 1 dB typical
FREQUENCY ACCURACY	± 1KHz typical
MAX RF INPUT	25 VDC MAX (DC Blocked), +30dBm (1W)
INPUT IMPEDANCE	50 Ω
AMPLITUDE RANGE	0 dBm to -85 dBm
INPUT CONNECTOR	Input 1: "BNC" is standard. F, TNC, SMA, N available. Input 2: Optional

Specification subject to change. ©2024 Avcom of Virginia, Inc. v042024

For ordering information email: salesrfq@avcomofva.com or call 804-794-2500

MSNG-2500 - TECHNICAL SPECIFICATIONS DATA CONTINUED

LNB POWER:	13-18V, 22kHz (Optional)
OPERATING TEMPERATURE RANGE	-10° C to +60° C
SIZE	6.625" L x 8.375" W x 5.0" H
WEIGHT	4.6lbs
POWER REQUIREMENTS	+15 VDC @ 1 amp typical
DISPLAY	5.7" TFT-LCD, 640x480 (VGA), 16-Bit RGB

<https://www.avcomofva.com/labview-legacy-gui-software/>

Specification subject to change. ©2024 Avcom of Virginia, Inc. 042024

For ordering information email: salesrfq@avcomofva.com or call 804-794-2500